

# Design of the FCC-ee Beam Polarimeter

Nickolai Muchnoi, Budker INP, Novosibirsk



THE HONG KONG  
UNIVERSITY OF SCIENCE  
AND TECHNOLOGY




HKUST JOCKEY CLUB  
INSTITUTE FOR ADVANCED STUDY

IAS PROGRAM


## High Energy Physics

January 7-25, 2019

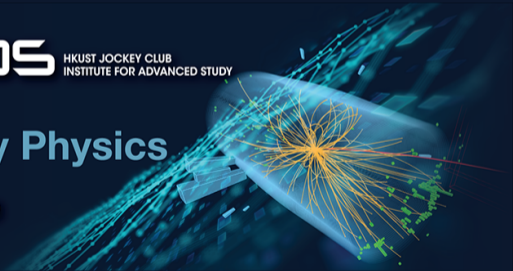

# Who Weighs How Much

<http://pdglive.lbl.gov>

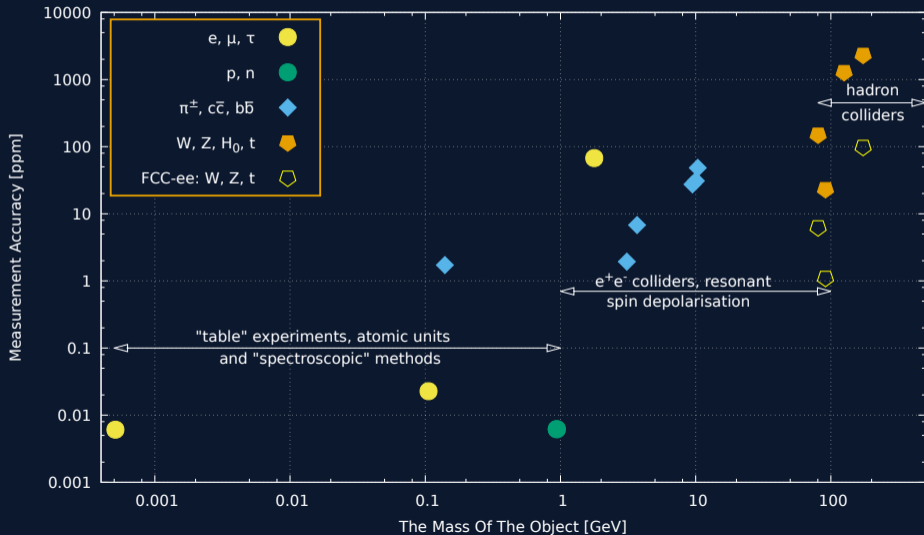

# $e^-e^+$ colliders


The CM energy in collision of electron with energy  $E_{e^-}$  and positron with energy  $E_{e^+}$  at crossing angle  $\theta$ :

$$E_{\text{cm}} = \left[ 2E_{e^+}E_{e^-} + 2m^2 - 2\cos\theta\sqrt{E_{e^+}^2 - m^2}\sqrt{E_{e^-}^2 - m^2} \right]^{\frac{1}{2}}$$

Roughly, for collider with  $\theta = \pi$  the average collision energy is:

$$\langle E_{\text{cm}} \rangle \simeq 2\sqrt{\langle E_{e^+} \rangle \langle E_{e^-} \rangle}$$

# $e^+e^- \rightarrow K_S K_L$ at VEPP-2000 (2013)

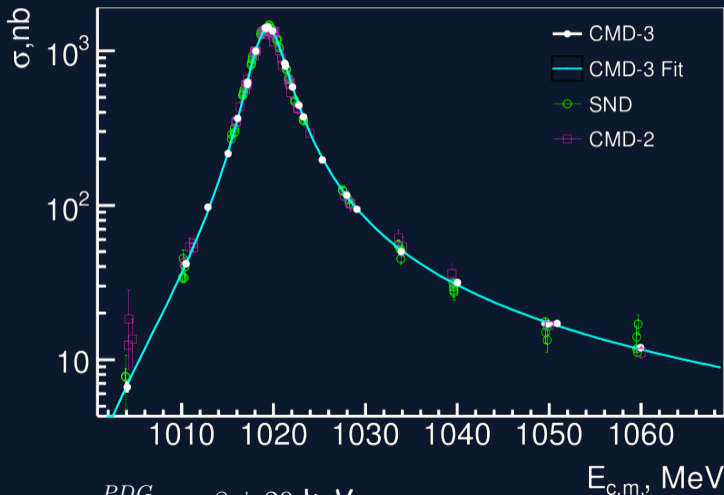

CMD-3 Fit:  $m_\phi - m_\phi^{PDG} = -8 \pm 20$  keV

# Electron charge and Lorentz force

Consider electron beam with energy  $E$  and velocity  $v = \beta/c$ . In a field  $B_{\perp}$  instant bent angle  $d\alpha$  per arc length  $dl$  is


$$d\alpha = \frac{ec}{\beta} \frac{B_{\perp}}{E} dl$$

The closed orbit is defined by:

$$\int_0^{2\pi} d\alpha = 2\pi = \frac{ec}{\beta E} \int_0^L B_{\perp}(l) dl$$

Beam energy:  $\beta E = \frac{ec}{2\pi} \int_0^L B_{\perp}(l) dl$

$\int B_{\perp}(l) dl$  accuracy by accelerator design parameters is  $\simeq 0.1\%$  or even worse.

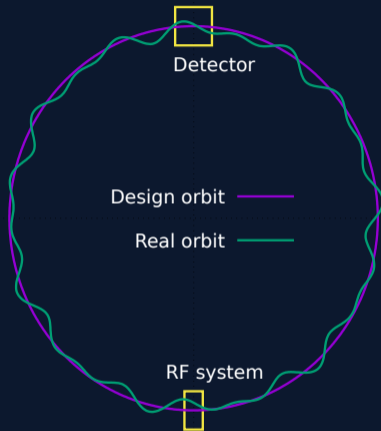

$$L = \beta c \cdot \frac{\text{harmonic number}}{\text{RF frequency}}$$

# Bargmann-Michel-Telegdi equation

Besides Lorentz force  $B_{\perp}$  exerts a torque on the electron magnetic dipole moment and turns it in lab frame to the angle:

$$d\varphi = \frac{ec}{\beta} \frac{B_{\perp}}{E} \left(1 + \gamma \frac{\mu'}{\mu_0}\right) dl = \left(1 + \gamma \frac{\mu'}{\mu_0}\right) d\alpha, \quad \text{where } \gamma = \frac{E}{mc^2}.$$

The ratio of the anomalous and normal parts of electron magnetic moment:

$$\frac{\mu'}{\mu_0} = \frac{g-2}{2} = 0.00115965218091 \pm 0.000000000000026$$

Electron  $\vec{\text{spin}}$  rotation is  $\left(1 + \gamma \frac{\mu'}{\mu_0}\right)$  times faster than its own rotation.

$B_{\perp}(l)$  does not affect  $\frac{d\varphi}{d\alpha}$ : this ratio only depends on electron  $\gamma$ -factor

# RD - Resonant Depolarization

- ▶  $\Omega$  - spin precession frequency
- ▶  $\omega$  - beam revolution frequency

$$\frac{d\phi}{d\alpha} = \frac{\Omega}{\omega} = 1 + \gamma \frac{\mu'}{\mu_0}$$


The  $\Omega/\omega$  ratio could be measured with accuracy better than 0.01 ppm.

RD approach requires:

- ▶ polarized beam,
- ▶ polarimeter & depolarizer.

Accuracy limitations ( $\Delta E_{cm}/E_{cm} \simeq 1$  ppm):


- ▶ rare measurements - interpolation,
- ▶ non-flat orbit -  $B_{||}$  affects  $\Omega$ ,
- ▶  $E_{beam}(i.p.) \neq \langle E_{beam} \rangle$ ,
- ▶ collision angle uncertainty, etc.

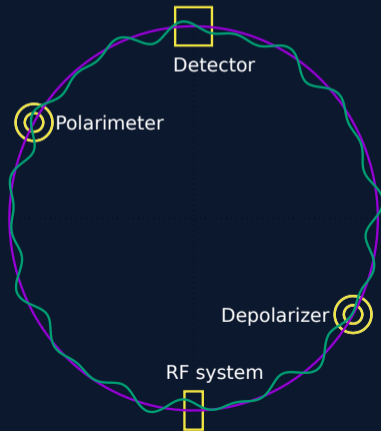

# RD Examples


HERA electron beam ( $E=27.6$  GeV)  
polarization build-up by the  
Sokolov-Ternov effect

26 June 2007

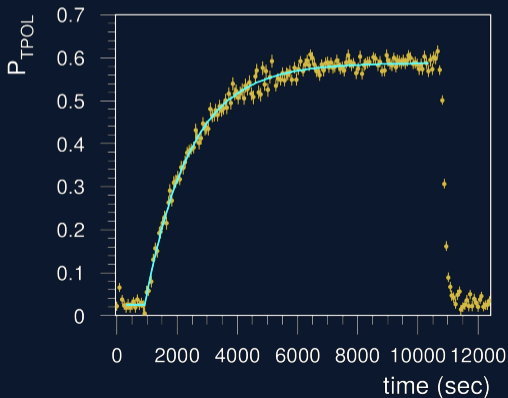

Slow  $e^-$  beam resonant depolarization  
at the VEPP-4M collider,  $E=1.852$  GeV

13 March 2008

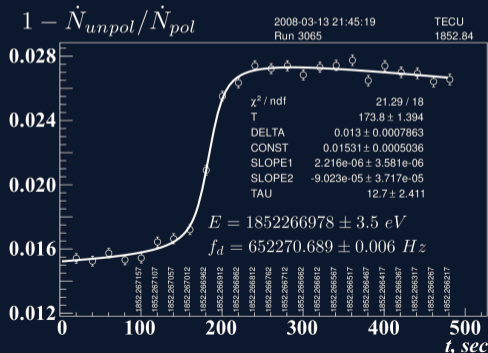

# Excerpts from FCC-ee CDR

- ▶ Beam energy calibration by Resonant Depolarization is the basis for the precise measurements of the  $Z$  and  $W$  masses with a precision of  $\sim 100$  keV and  $\sim 500$  keV correspondingly.
- ▶ About 200 polarized pilot bunches/ring will not collide - just used for frequent beam energy measurements by RD.
- ▶ It is impossible to use RD at higher beam energies since the increased energy spread make the spin resonances too strong, reducing the asymptotic polarization to an unacceptably small value.
- ▶  $E_{\text{cm}}$  near the  $e^+e^- \rightarrow t\bar{t}$  threshold will be measured by the final state reconstruction of  $e^+e^- \rightarrow W^+W^-, ZZ, Z\gamma$  events and from the knowledge of the  $W$  and  $Z$  masses.

# Polarimeters on the Compton Effect

- ▶ Fast measurement of beam polarization is required for precise beam energy determination by RD.
- ▶ Positive experience at high beam energies - LEP, HERA, SLD.
- ▶ Known recipes: analyze scattered photons for transverse beam polarization, for longitudinal - use scattered electrons.
- ▶ Inverse Compton scattering is used for direct beam energy calibration at low-energy  $e^\pm$  colliders: VEPP-4M, BEPC-II, VEPP-2000.
- ▶ Extend the latter experience for high energy colliders?

# Inverse Compton Scattering


Scattering parameter

$$u = \frac{\omega}{\varepsilon} = \frac{\theta_\varepsilon}{\theta_\omega} = \frac{\omega}{\varepsilon_0 - \omega} = \frac{\varepsilon_0 - \varepsilon}{\varepsilon}$$

is in the range

$$u \in [0, \kappa], \text{ where } \kappa = \frac{4\omega_0\varepsilon_0}{(mc^2)^2}$$

$$\kappa \simeq 1.53 \text{ if } \varepsilon_0 = 100 \text{ GeV \& } \omega_0 = 1 \text{ eV}$$

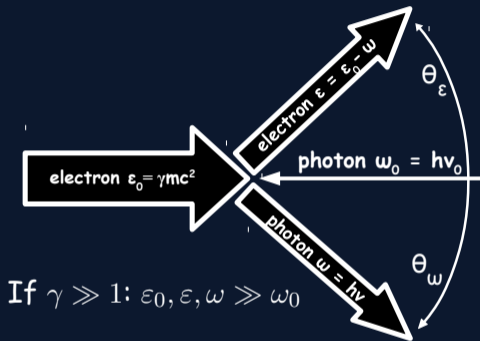


If  $\gamma \gg 1$ :  $\varepsilon_0, \varepsilon, \omega \gg \omega_0$


$$\text{Scattering angles: } \theta_\omega = \frac{1}{\gamma} \sqrt{\frac{\kappa}{u} - 1}; \quad \theta_\varepsilon = \frac{u}{\gamma} \sqrt{\frac{\kappa}{u} - 1}.$$

**Note:**  $\max(\theta_\varepsilon) = 2\omega_0/mc^2$  (when  $u = \kappa/2$ ). It is  $\simeq 10 \mu\text{rad}$  for green light.

# Generic configuration: x-z plane

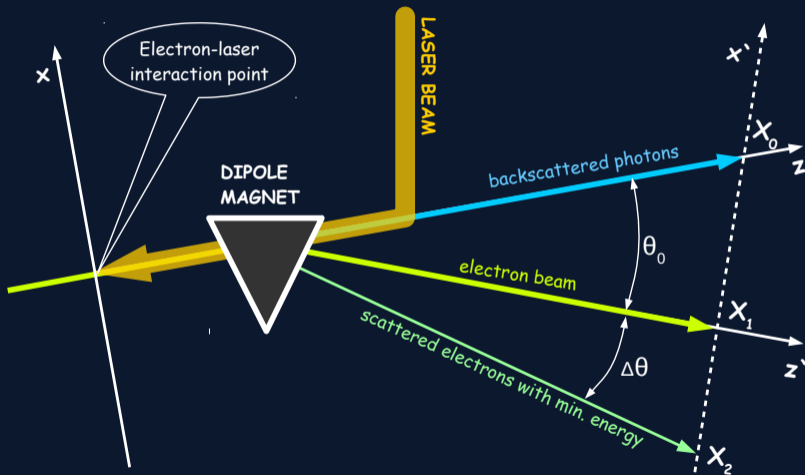


# Beam Energy Calibration: Scattered $\gamma$ -s

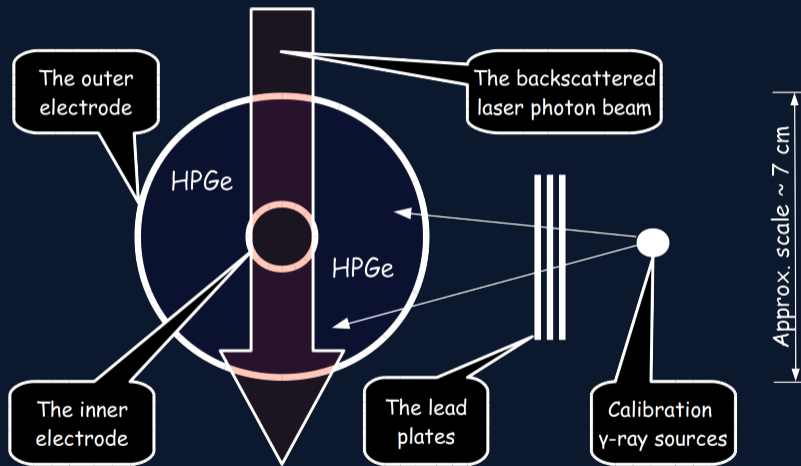

VEPP-4M (2005) ○ BEPC-II (2010) ○ VEPP-2000 (2012)

# Compton $\gamma$ -spectrum: BEPC-II


positron: 2018.04.27 [19:20:24 - 12:31:37] 2018.04.28. Live-time: 4 hours 21 min 5 s (16 files).

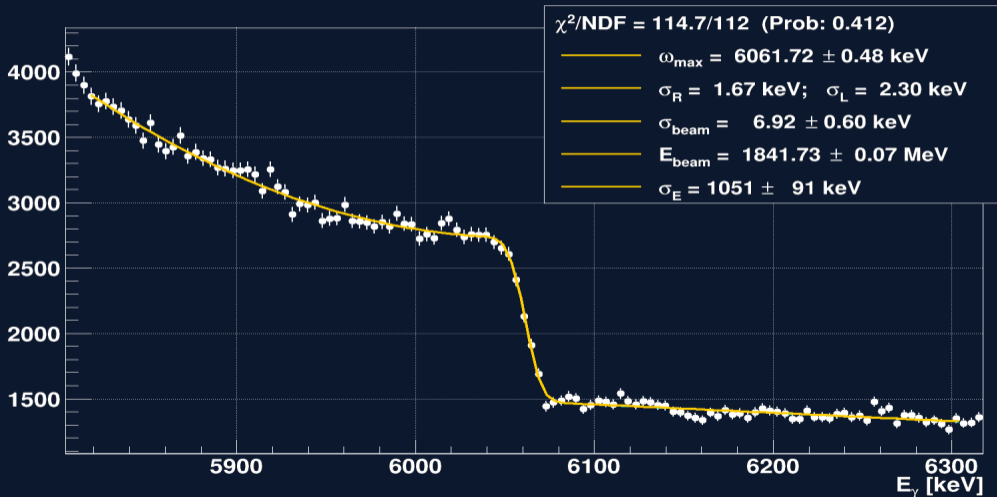

$\text{CO}_2$  laser ( $\lambda_0 = 10.5910352 \mu\text{m}$ ) backscattering in the BEPC-II straight section

# Compton $\gamma$ -spectrum: VEPP-2000

porridge: 2017.02.27 [23:16:34 - 04:07:28] 2017.02.28. Live-time: 3 hours 21 min 44 s (10 files).

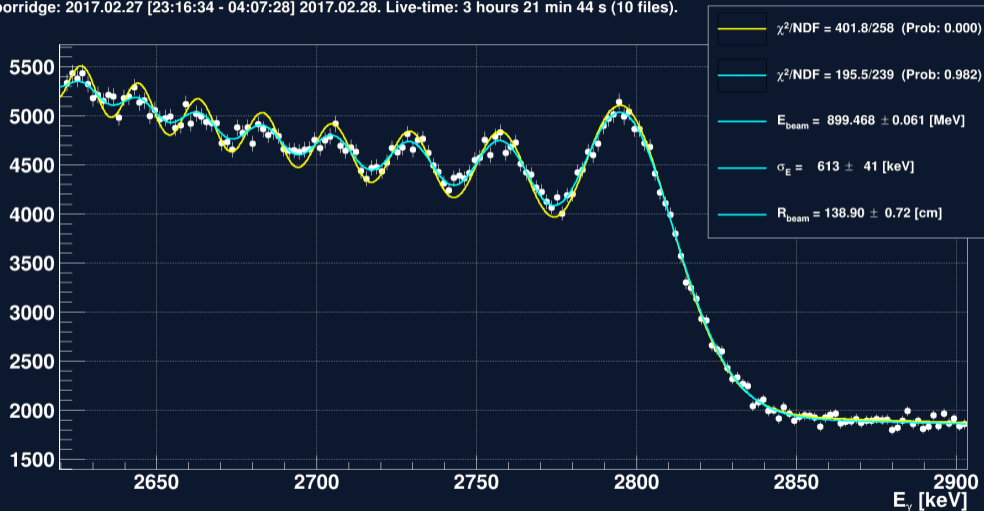

CO laser ( $\lambda_0 = 5.426463 \mu\text{m}$ ) backscattering in the VEPP-2000 bending dipole

# Scattered electrons

The energy  $\varepsilon$  of scattered electron is:

$$\varepsilon = \frac{\varepsilon_0}{1 + u} \rightarrow \min(\varepsilon) = \frac{\varepsilon_0}{1 + \kappa}$$

Electron bending angle is defined by  $B = ec \int B_{\perp}(l) dl$ :

$$\theta_{\max} \equiv \frac{B}{\min(\varepsilon)} = \frac{B}{\varepsilon_0} + \kappa \frac{B}{\varepsilon_0} = \frac{B}{\varepsilon_0} + \frac{4\omega_0 B}{(mc^2)^2} = \theta_0 + \Delta\theta$$

---

Maximum angles of scattered electrons:

scattering:  $\max(\theta_{\varepsilon}) = \frac{2\omega_0}{mc^2}$


bending:  $\Delta\theta = \frac{2\omega_0}{mc^2} \cdot \frac{2B}{mc^2}$

---

Beam energy:  $\gamma = \frac{mc^2}{4\omega_0} \cdot \frac{\Delta\theta}{\theta_0}$

$\int B_{\perp}(l) dl$  IS NOT REQUIRED!


# Generic configuration: x-z plane

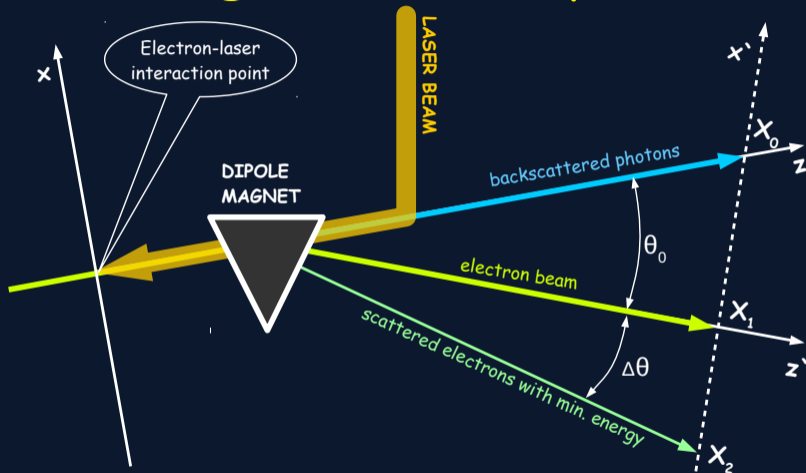

Since  $\Delta\theta = \kappa\theta_0$  direct beam energy calibration is possible: 
$$E = \frac{(mc^2)^2}{4\omega_0} \cdot \frac{\Delta\theta}{\theta_0}$$


# FCC-ee polarimeter: x-z plane

FCC-ee polarimeter & spectrometer:  $E_0 = 45.6$  GeV,  $\omega_0 = 2.33$  eV,  $\kappa = 1.63$ .

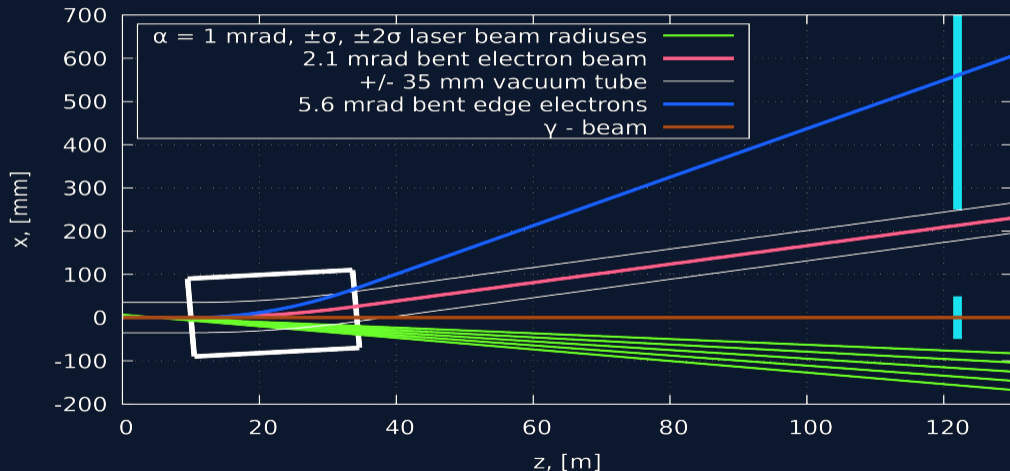


Blue bars - 2D silicon pixel detectors for scattered electrons & photons.

# Integration to lattice (K. Oide, 2018)

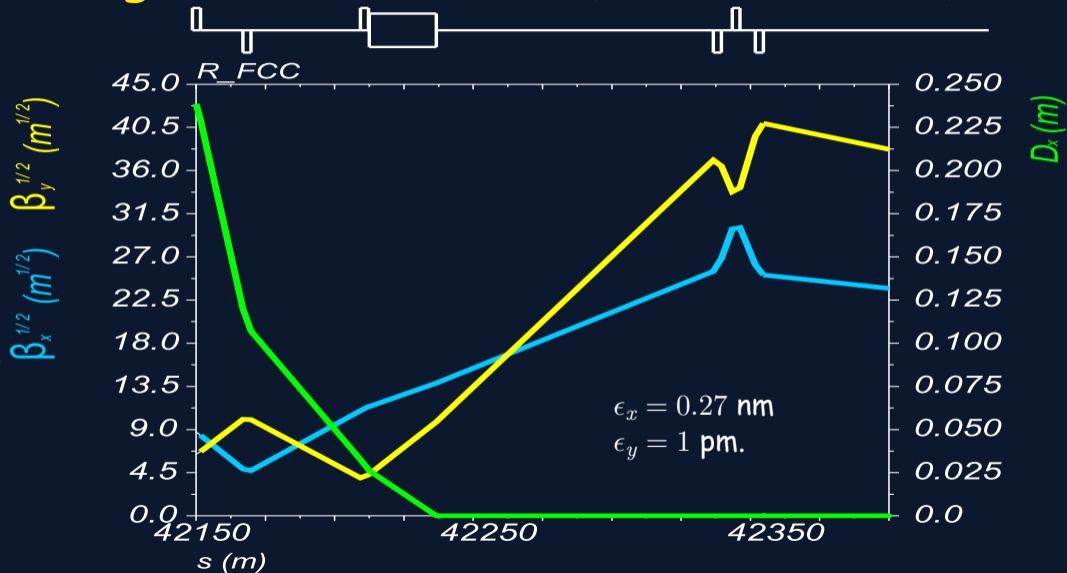

# The Polarimeter: $x'$ - $y'$ plane

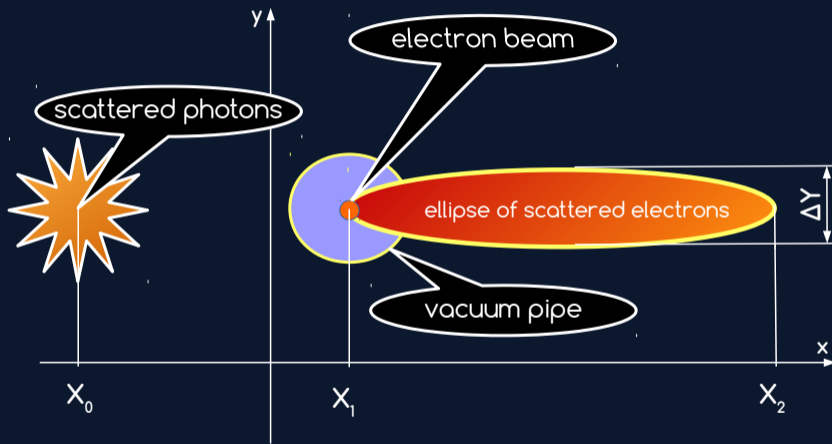

Direct beam energy measurement is: 
$$E = \frac{(mc^2)^2}{4\omega_0} \cdot \frac{X_2 - X_1}{X_1 - X_0}$$





# Si pixel detector for scattered electrons

- ▶ Detector size:  $L_x = 400 \text{ mm}, L_y = 4 \text{ mm}$
- ▶ Number of pixels:  $N_x = 400, N_y = 80$
- ▶ Pixel size:  $S_x = 1 \text{ mm}, S_y = 50 \mu\text{m}$





The similar setup have been studied in ILC note LC-M-2012-001:

"A Transverse Polarimeter for a Linear Collider of 250 GeV e Beam Energy"




# Scattered $\gamma$ & $e$ : $\xi_{\parallel}\zeta_{\perp} = +0.25$

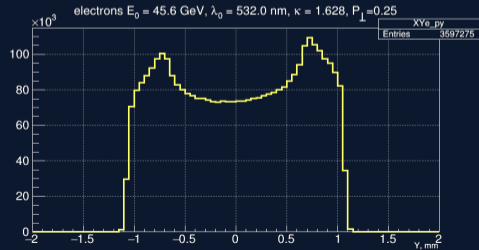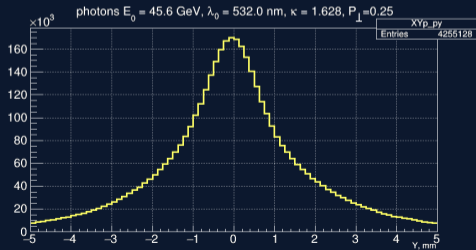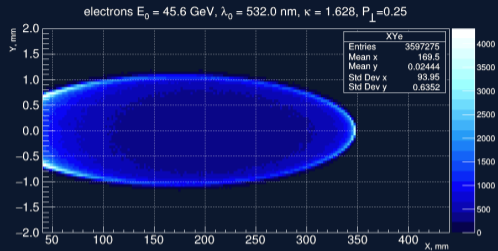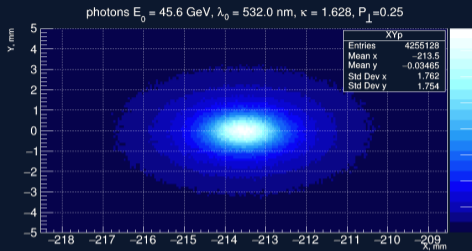

# Scattered $\gamma$ & $e$ : $\xi_{\parallel}\zeta_{\perp} = -0.25$

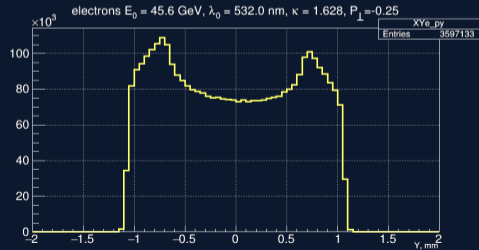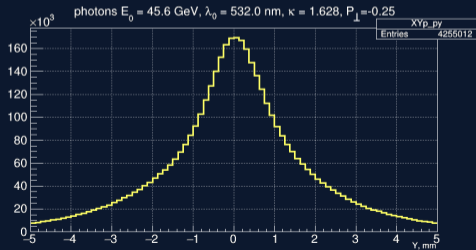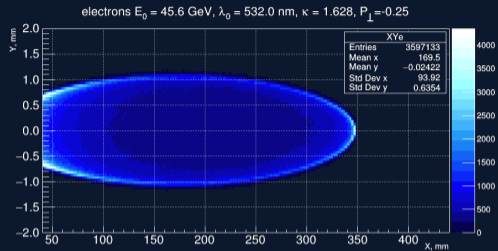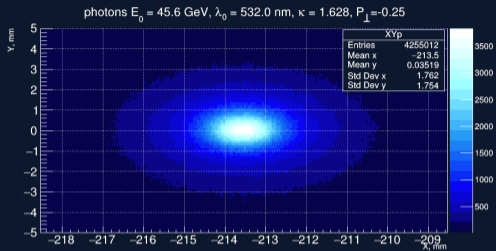

# Scattered $\gamma$ & $e$ : The Difference

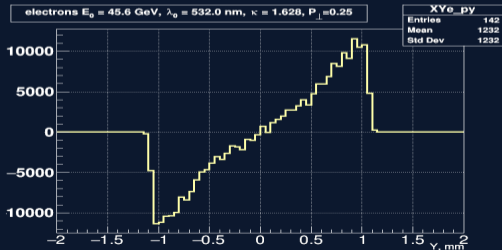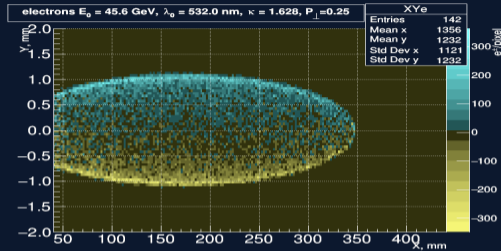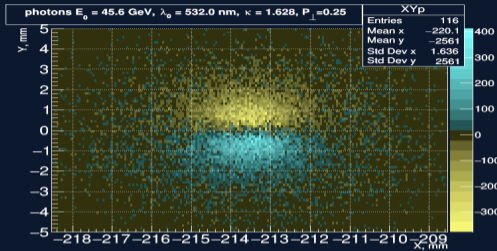

# Polarimetry with electrons

- ▶ Maximum polarization asymmetry  $d\sigma_{\perp}$  is observed at the angles  
 $\theta_y^{\gamma} = \pm mc^2 / E_{\text{beam}}$  for photons - doesn't depend on  $\omega_0$ ;  
 $\theta_y^e = \pm 2\omega_0 / mc^2$  for electrons - doesn't depend on  $E_{\text{beam}}$ .
- ▶ Scattered electrons propagate to the inner side of the beam orbit: there is no direct background from high energy SR photons.
- ▶ Electrons are ready to be detected by their ionization losses while  $\gamma$ 's need to be converted to  $e^+e^-$  pairs: this leads either to low detection efficiency either to low spatial resolution.
- ▶ The flux density of electrons is much lower due to bending and corresponding spatial separation by energies. Simultaneous detection of multiple scattered electrons is thus much easier.
- ▶ Analysis of the scattered electrons distribution allows to measure the longitudinal beam polarization as well as the transverse one.

# Compton Scattering cross section


for circular polarization of light  $\xi_{\circ} = \pm 1$  depends on both longitudinal  $\zeta_{\circ}$  and transverse  $\zeta_{\perp}$  polarizations of the electron:

$$d\sigma_0 = \frac{r_e^2}{\kappa^2(1+u)^3} \left( \kappa(1+(1+u)^2) - 4\frac{u}{\kappa}(1+u)(\kappa-u) \right) du d\varphi,$$
$$d\sigma_{\parallel} = \frac{\xi_{\circ}\zeta_{\circ}r_e^2}{\kappa^2(1+u)^3} u(u+2)(\kappa-2u) du d\varphi,$$
$$d\sigma_{\perp} = -\frac{\xi_{\circ}\zeta_{\perp}r_e^2}{\kappa^2(1+u)^3} 2u\sqrt{u(\kappa-u)} \cos(\varphi - \phi_{\perp}) du d\varphi.$$


For vertical electron (beam) polarization  $\phi_{\perp} = \pi/2$

# Fit: cross section & emittance

electrons  $E_0 = 45.6$  GeV,  $\lambda_0 = 532.0$  nm,  $\kappa = 1.628$ ,  $P_{\perp} = 0.10$

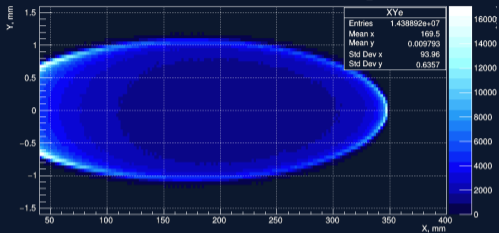

$F(x,y)$

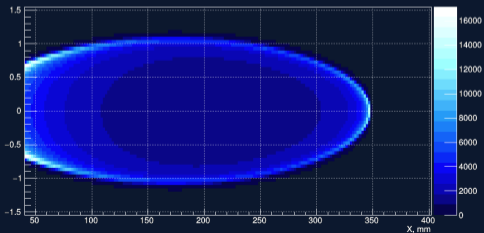

$\chi^2/\text{NDF} = 6356.7/6129$  | Prob = 0.0208

$X_0 = -213.538 \pm 0.000$  mm

$X_1 = -000.008 \pm 0.010$  mm

$X_2 = 0347.631 \pm 0.003$  mm


$\sigma_x = 194.8 \pm 4.4$   $\mu\text{m}$

$\sigma_y = 23.69 \pm 0.02$   $\mu\text{m}$

$E_{\text{beam}} = 45.6032 \pm 0.0035$  GeV.

$P_{\perp} = 0.0997 \pm 0.0016$

$(F(x,y) - H(x,y)) / H(x,y)^{1/2}$

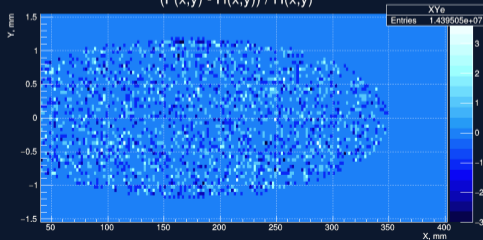

# Laser parameters

- ▶  $\lambda_0 = 532 \text{ nm}$ , waist  $\sigma_0 = 0.25 \text{ mm}$ ,  $z_R = 148 \text{ cm}$ , divergence  $\theta = 0.169 \text{ mrad}$ .
- ▶ Interaction angle  $\alpha = 1.0 \text{ mrad}$  (horizontal crossing).
- ▶ Laser pulse:  $E_L = 1 \text{ mJ}$ ,  $\tau_L = 5 \text{ ns}$ ,  $f = 3 \text{ kHz}$ ,  $P_L = 80 \text{ kW}$ ,  $\langle P_L \rangle = 3 \text{ W}$ .
- ▶ Beam electron energy  $E_{beam} = 45.6 \text{ GeV}$ , cross section  $R_\times \simeq 50\%$ .
- ▶ Scattering probability  $W = P_L/P_c \cdot R_\times \cdot \eta(R_L, R_A) \simeq 7 \cdot 10^{-8}$ .
- ▶  $N_e = 10^{10} e^\pm/\text{bunch}$ :  $\dot{N}_\gamma = f \cdot N_e \cdot W \simeq 2 \cdot 10^6 \text{ s}^{-1}$ .

# Summary

- ▶ Detecting both scattered photons & electrons increases the reliability of beam polarization measurement.
- ▶ FCC-ee polarimeter provides  $\simeq 1\%$  / s accuracy for  $\zeta_{\perp}$ .
- ▶ The beam energy spectrometer option does not require mandatory neither the B-field measurement nor the BPMs data:
  - ▶ statistical precision  $\Delta E/E \simeq 100$  ppm / 10 sec;
  - ▶ systematic effects estimation requires further studies: yet no limitations;
  - ▶ test of the approach does not require high beam energy and should be performed with low emittance beam at low energy.
- ▶ Polarimeter allows to measure beam sizes & positions.